KT-100M User's Guide

Digital Auto-Searching

Panel description

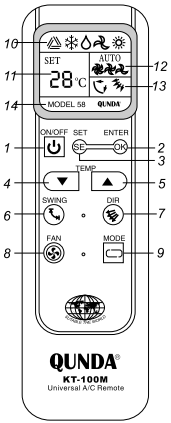

1.Power button
2.Confirmation button
3.Setup button
4.Temperature'-'
5.Temperature'+'
6.Auto wind directions
7.Wind directions
8.Wind strength button
9.Mode button
10.Operation mode
11.Temperature display
12.Wind strength display
13.Swing directions
14.Mode code

Setting up steps

Manual setup steps:
1.Refer the CODE FORM and find the code number standing for the brand And power on your Air-conditioner by hand.
2.Repeat the press "set" button several times the number you want flashing on the mode window.
3.Press "ok" button,the mode code stop flashing.Set-up is finished.You can use the controller to control your Air-conditions.

Find the code
↓
Repeat press "set"button → Setup
↓
Mode code flashing On the 'mode' window
↓
Press "OK" button → Confirmation
↓
Mode code stop flashing
↓
Setup is finished

Auto-Searching steps:
1.Power on your Air-conditioner by hand
2.Point the controller directly at your Air-conditioner Repeat the press "set" button several times until Air-conditioner can Auto-playing cor Auto-stopped,then press "OK" button.
3.Setup is finished.

Power on your Air-condition by hand
↓
Point the controller directly at your Air-conditioner
↓
Repeat press "SET" button ↓ (No)
↓
Air-conditioner Auto playing
↓ Yes
Press "OK" button
↓
Setup is finished

Special Instructions

① Insure that your Air-conditions receiver is working order,if your Air-conditions did not receiving it probably is not capable of begin controlled by a remote controller.
② Using the remote controller will not increase the functions of your Air-conditions.Under normal conditions.Batteries will last up to 12 months. If the remote controller does not operate properly.The batteries might be worn out.Do not mix different type of batteries together.
To prevent electrolyte from leaking remove the batteries.When you plan not to use the controller for a long period of time.

CODE FORM FOR THE COMPONENTS

BRAND	CODE	BRAND	CODE
MITSUBISHI INDUSTRY	0~14	KELONG	53、90、91
		JOHNSO	92
SANYO NEC	15~37、63、81	WHIRLPOOL	61、92
		HUABAO	90、93、94
CORONA	45~48	WEILI	87、96、97
FUJITSU	48~50	RAYBO	98
SHARP	50~55、80	SHENGFENG FEILU	99
TOSHIBA	56、57	CHANGHONG	15、33、27、22、81 55、18、19、21、23
HITACHI	58		
MITSUBISHI ELECTRIC	59、60、92	LIANGYU	92
NATIONAL	61、62	SOVA	71、93
CHUNLAN	64、65	XILENG	64、99
GREE	66、67、86	HUALING CONROWA	60
SAMSUNG	68、69	GOLDSTAR	77
CHIGO	70	PHILCO	76
HUIFENG	1	UNI-AIR	84
DAIKIN	72~75	ELECTROLUX	89
CHANGFU	72~76	GALANZ	59、60、92
LG	77	YINGYAN	7
MIDEA	1、56、78、79	BOERKA	60、89
HAIER	82、83、84、	HUIKANG	70
MCQUAY	85	HISEN	15、18、19、21、22、23
YORK	66、85	TCL	60、7
CARRIER	88	KONKA	60
TOBO	89	SHINCO	95

When remote contol following models,refer to"Auto-searching steps"↓

AUX AUCMA SHUAIKANG ROWA SHARGE LITTLEDUCK SHENBAO TOYO TONGYI JMSTAR REAM AIDELONG RICHVAST MENEED SEAPORT ZONGSHEN GEEWEE TIANYUAN SHINING FEIDASHI HUAGAO YAOMA YILAITE TELING FUSHI ARISTON LIKAIER DAYU QINGHUATONGFANG LANGGE KANGDI BEILAIER BOER GUQIAO ZHIAN WANJIALE SUOYI MINGZHOUBAO NISHUANG CKC FEIPU BENDAO DAOTIAN AOLI RICAI LVDAOFENG XINCHENG MEIHAO GUANGDA TECO SANZUAN BORLER SANLU HUAYU SEVENSTARS NISO DAYRELAX YANGZI TAILING SHENBAO QIDI DONGXIA KEMING GRASEA JM SNOWPEAR SEAYO KAIDA FIMOUSE RIJIANG WEITELI LIANFEI ZUODAN ZHONGLI YUANDA TICA HIKOM AOKE

SUZHOU QUNDA ELETRONICS CO.,LTD Web:www.qunda.com